

CITY OF LEON VALLEY




BID #2015 -03 FY 2016 City of Leon Valley Detention Area 2

GENERAL NOTES


1. ALL UTILITY LOCATIONS SHOWN ARE APPROXIMATE ONLY. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO LOCATE ALL THE EXISTING UNDERGROUND UTILITIES PRIOR TO ANY EXCAVATION. ANY DAMAGE TO UTILITIES WILL BE CONTRACTORS RESPONSIBILITY.
2. ALL CONSTRUCTION METHODS AND MATERIALS IF NOT SHOWN SHALL BE PER STANDARD SPECIFICATIONS OF THE CITY OF LEON VALLEY, THE CITY OF SAN ANTONIO STANDARDS AND SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION, TxDOT STANDARDS AND SPECIFICATIONS (LATEST EDITIONS).
3. CONTRACTOR IS TO OBTAIN ALL NECESSARY PERMITS.
4. PROVIDE A MINIMUM OF 2" CONCRETE COVER OVER ALL REINFORCING.
5. PROVIDE EXPANSION JOINTS FOR CONCRETE. CUT TO SHAPE EVERY 40' AND AT ANGLE POINTS.
6. ALL REINFORCING STEEL SHALL BE CONTINUOUS WITH SPLICES LAPPED 40 DIAMETERS. GRADE 60 KSI.
7. ALL CONCRETE SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 3000 P.S.I. @ 28 DAYS, UNLESS OTHERWISE NOTED.
8. CONTRACTOR TO CONTACT UTILITY LOCATOR AT 811. AT THE CITY OF LEON VALLEY 210-681-1850.

INDEX TO DRAWINGS

- C1. COVER SHEET
- C2. DETENTION AREA 2 SITE AND GRADING PLAN
- C3. DETENTION AREA 2 ENLARGED DETAILS
- C4. TEMPORARY EROSION, SEDIMENT & WATER POLLUTION CONTROL MEASURES STANDARDS

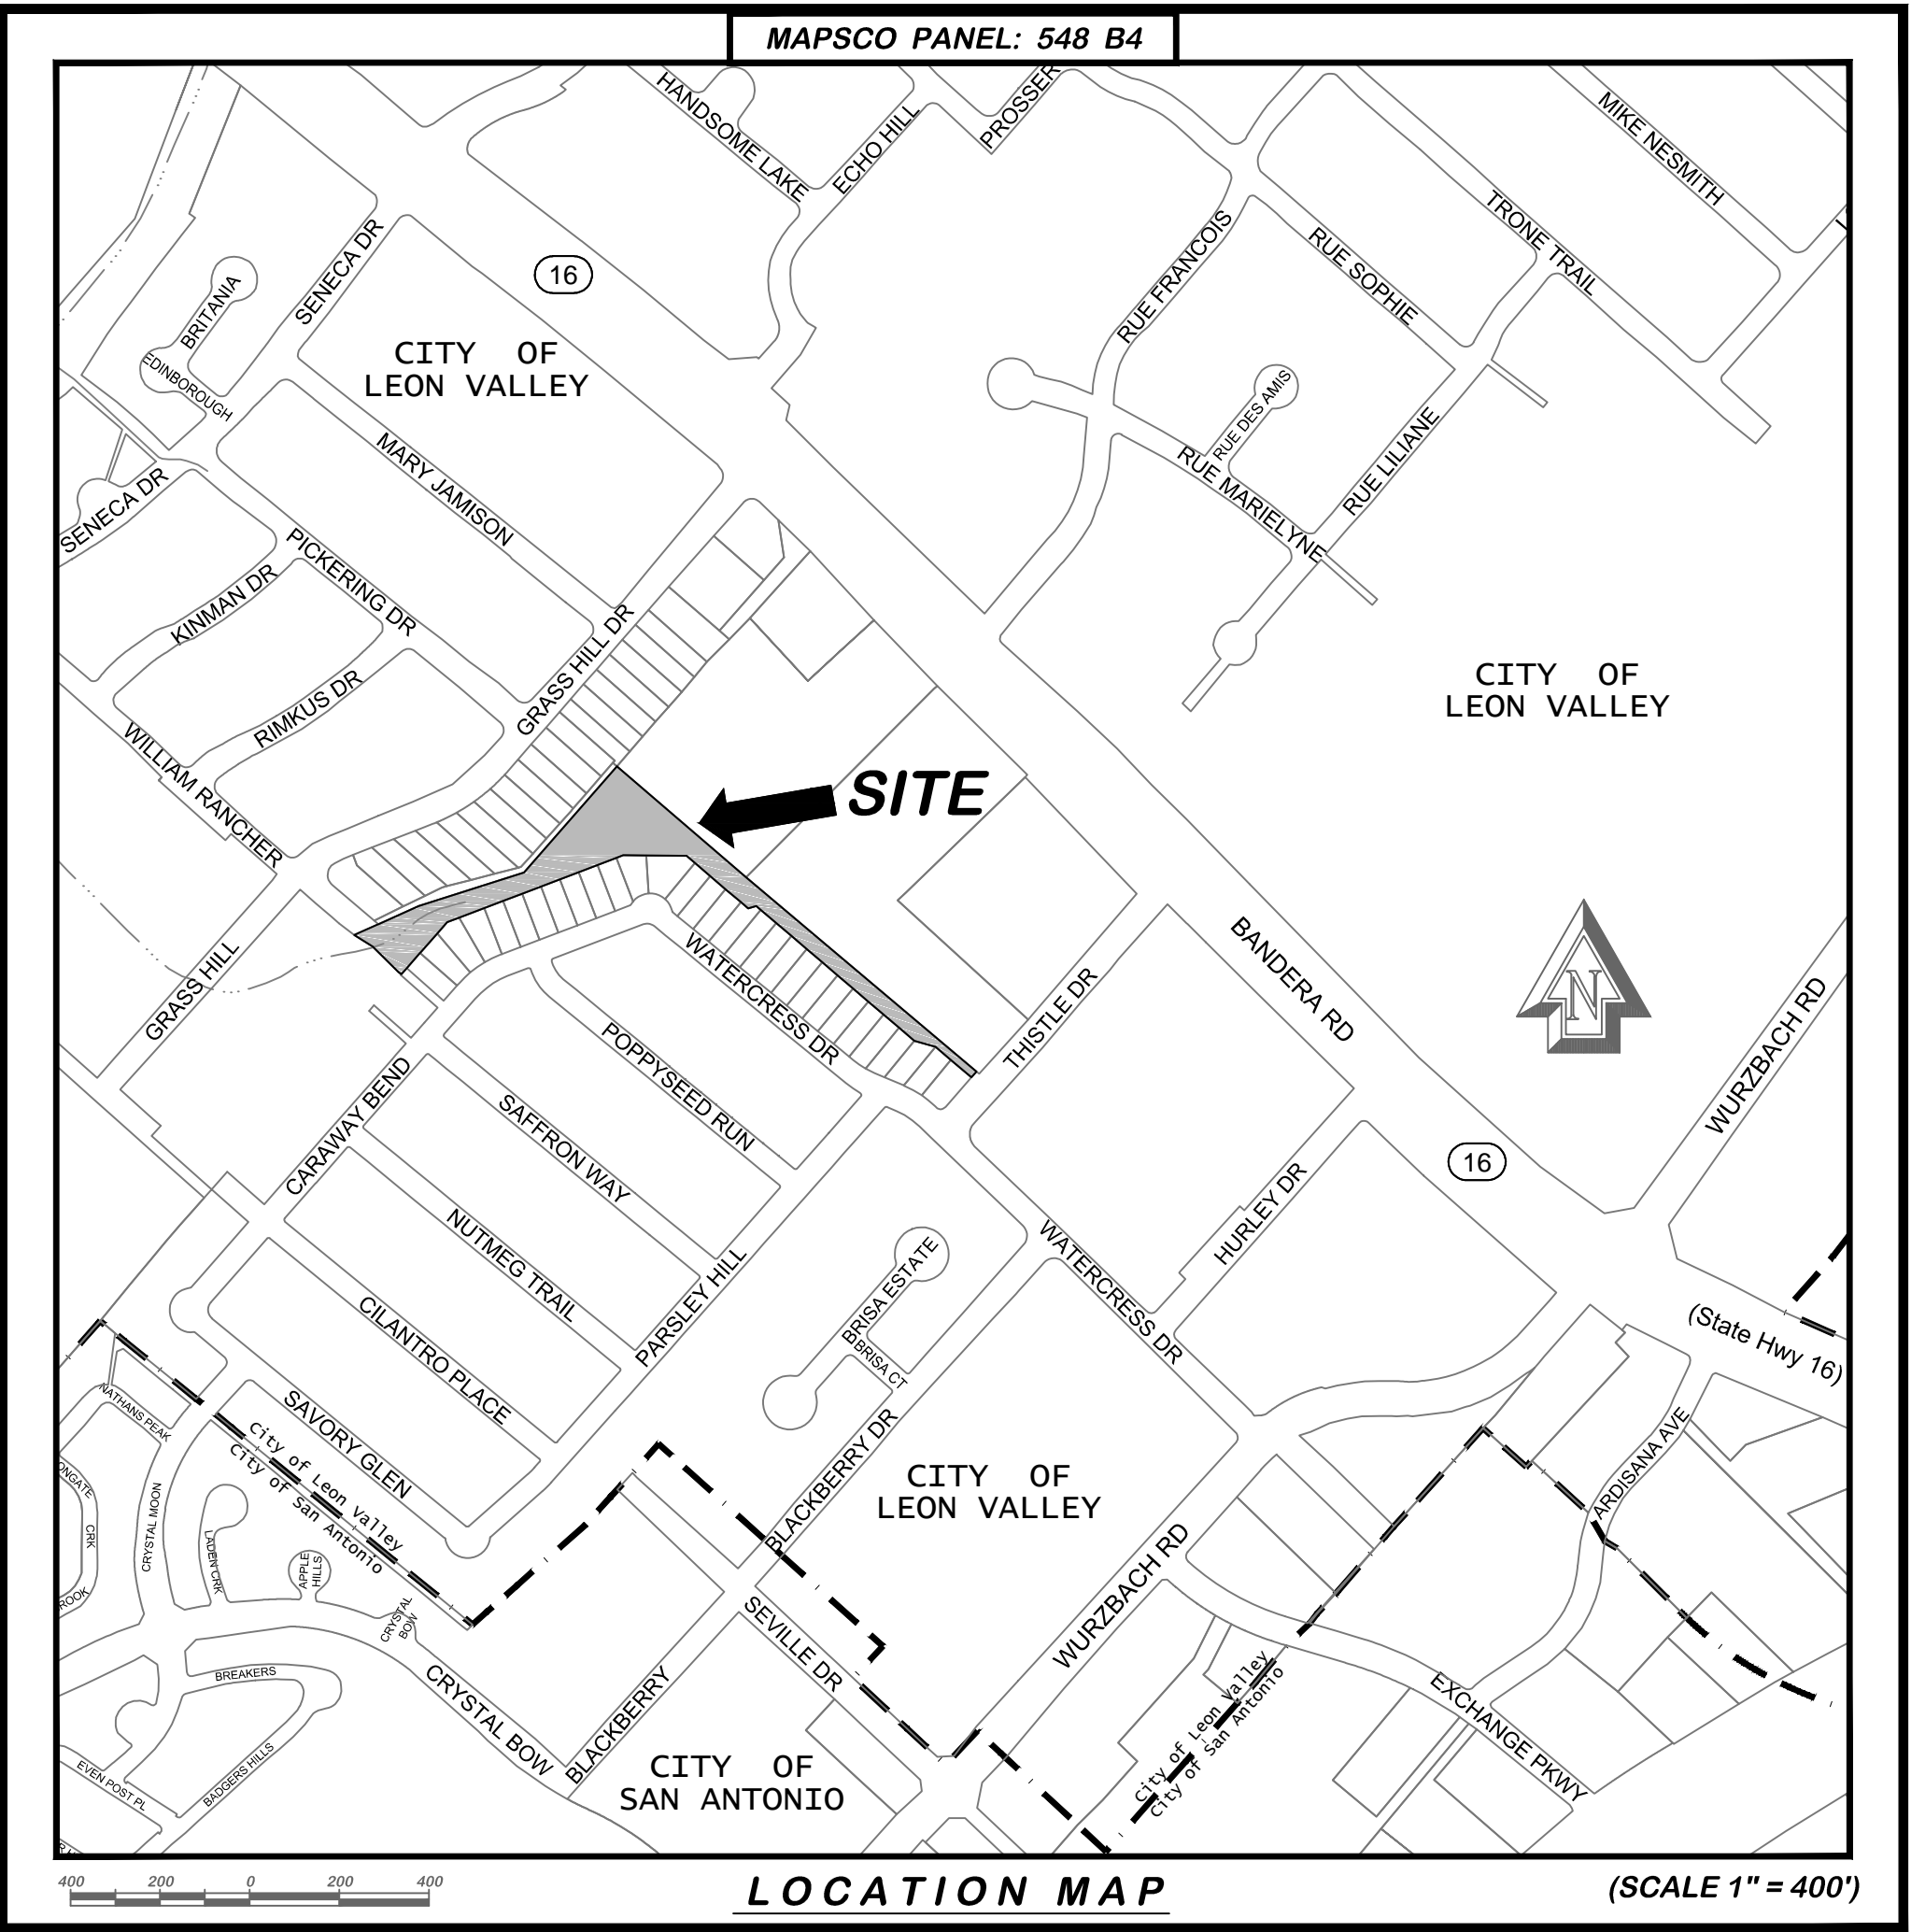

SIA ENGINEERING, INC.

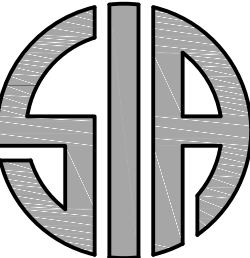

6977 SAN PEDRO AVE.
SAN ANTONIO, TEXAS 78216-6245
VOICE: (210) 341-5500 FAX: (210) 308-0662
TBPE FIRM No. F-1892 TBPLS FIRM No. F-100380-00
WWW.SIA-ENGINEERING.COM

