



ADDENDUM NO. 2

PROJECT NAME: **Huebner Creek Hike and Bike Trail – BID #2022-07**

DATE: June 24, 2022

This addendum should be included in and be considered part of the plans and specifications for the name of the project. The contractor shall be required to sign an acknowledgment of the receipt of this addendum and submit it with their bid.

Addendum No. 2 is issued to notify, add, change and replace the following:

I. General Clarifications:

1. Callout for Class A concrete was updated on Concrete Sidewalk Section Typical Section Type B, sheet 7.
2. Concrete quantities were updated on the Base Price Bid Items.

II. Plans and Contract Documents:

1. Remove and replace page 7 Proposed Typical Sections from the plans with the attached page.
2. Remove and replace page 83 Unit Price Bid Items from the Contract Documents with the attached pages.

Attachments:

- a) Addendum Acknowledgement form (1 Page)
- b) Proposed Typical Sections, plan set Sheet 7 (1 Page)
- c) Base Price Bid Items Sheets 83 (1 Pages)

Total Pages Addendum No. 2: (3 Pages)

END OF ADDENDUM No. 2



Note: Addenda Acknowledgement Form for Addendum No. 2 is attached herein. This form must be signed and submitted with the bid package.

RECEIPT OF ADDENDUM NUMBER(S) 2 IS HEREBY ACKNOWLEDGED FOR PLANS AND SPECIFICATIONS FOR CONSTRUCTION OF HUEBNER CREEK HIKE AND BIKE TRAIL – BID #2022-07

FOR WHICH BIDS WILL BE PUBLICALLY OPENED ON TUESDAY, JUNE 28, 2022 AT 2:00 P.M.

THIS ACKNOWLEDGEMENT MUST BE SIGNED AND RETURNED WITH THE BID PACKAGE.

Company Name: _____

Address: _____

City/State/Zip Code: _____

Date: _____

Signature

Print Name/Title

Total Price _____
dollars

and _____ cents

ITEM	DESCRIPTION	QTY	UNITS	UNIT PRICE	TOTAL PRICE
4000 6007	PREFAB PED STL TRUSS BRIDGE SPAN (45FT)	1	EA	\$	\$

Price/EA _____
dollars

and _____ cents

Total Price _____
dollars

and _____ cents

ITEM	DESCRIPTION	QTY	UNITS	UNIT PRICE	TOTAL PRICE
1001 COLV	CEDAR SPLIT RAIL FENCE	2230	LF	\$	\$

Price/LF _____
dollars

and _____ cents

Total Price _____
dollars

and _____ cents

ITEM	DESCRIPTION	QTY	UNITS	UNIT PRICE	TOTAL PRICE
1002 COLV	CONC SIDEWALK (5")	920	CY	\$	\$


Price/CY _____
dollars

and _____ cents


Total Price _____
dollars

and _____ cents

Plotted by: rh.inostroza
3/24/2022
S:\Projects\Leon Valley\170165 Professional Ena Svc\332 El Verde Hike and Bike Trail\20-Drawings\Plans\Civil\170165_332_TYP_XSECT.dgn

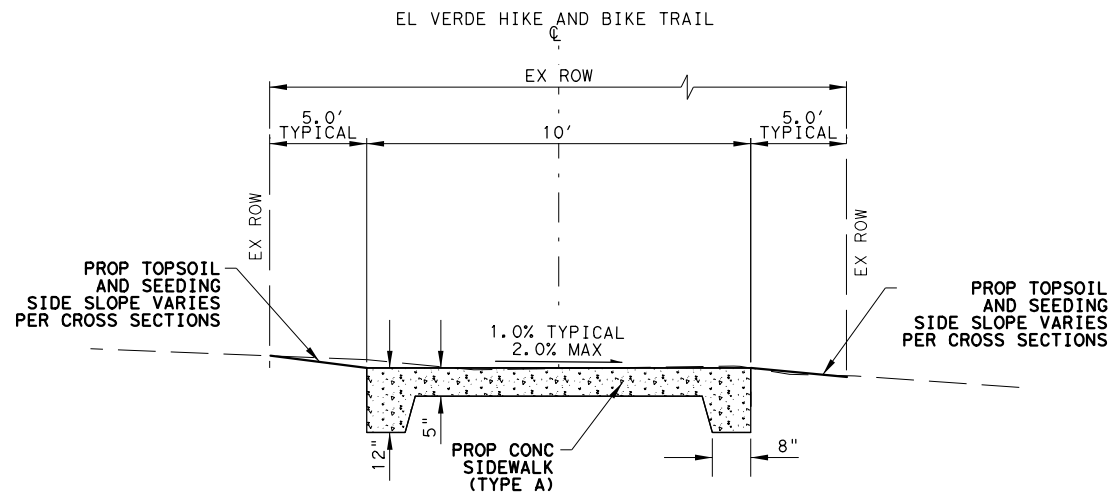


EL VERDE HIKE & BIKE TRAIL
TYPICAL SECTION (SIDEWALK TYPE A)
STA 18+00.00 TO STA 42+00.00

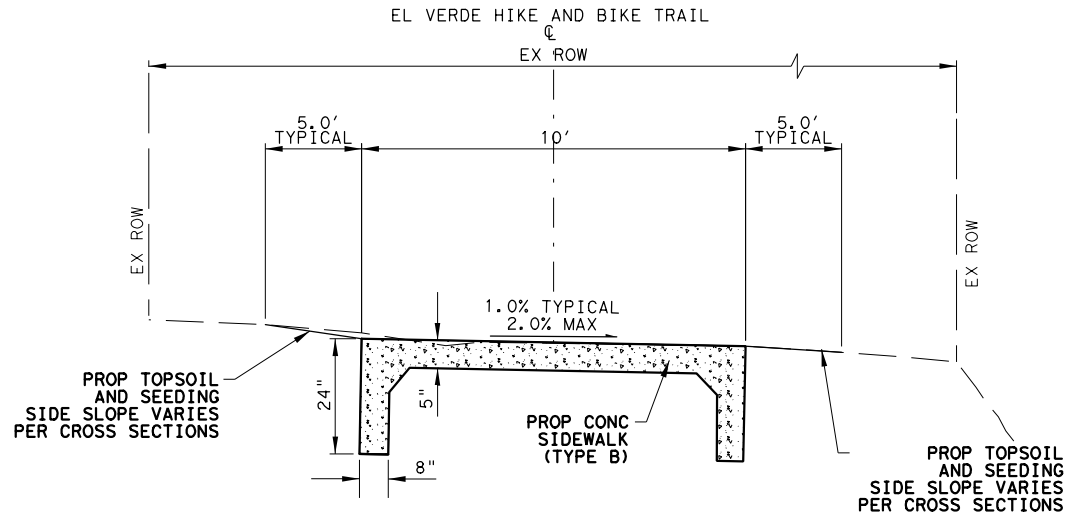

EL VERDE HIKE & BIKE TRAIL
TYPICAL SECTION (SIDEWALK TYPE B)
STA 10+00.00 TO STA 18+00.00
STA 42+00.00 TO STA 54+61.99


GENERAL NOTES:

1. CONCRETE SIDEWALK SHOWN SHALL MEET THE MINIMUM SPECIFICATION REQUIREMENTS OF CLASS "A" CONCRETE PER ITEM 531 AND 421.
2. ALL REINFORCING STEEL SHALL BE GRADE 60.
3. GROOVED JOINTS IN THE SIDEWALK SHALL BE AT MAX. SPACING OF 10 FT. AND SHALL HAVE 3/4" EXPANSION JOINTS AT A MAX. SPACING OF 50 FT.
4. WHEN TRANSITIONING FROM TYPE A TO TYPE B SIDEWALK CONSTRUCT AN EXPANSION JOINT.

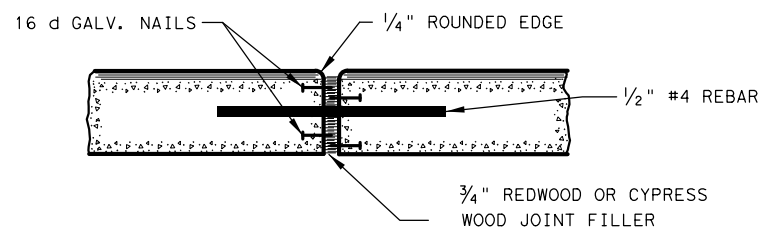


TYPICAL EXPANSION JOINT DETAIL


EXPANSION JOINTS TO BE PLACED AT BEGINNING AND END OF CURVES, DRIVEWAYS WHEELCHAIR RAMPS, INLETS, ILLUMINATION/ SIGNAL FOUNDATIONS, AND OTHER FIXED OBJECTS.
PLACE A MINIMUM OF FOUR (4) DOWEL BARS AT 18" O.C.

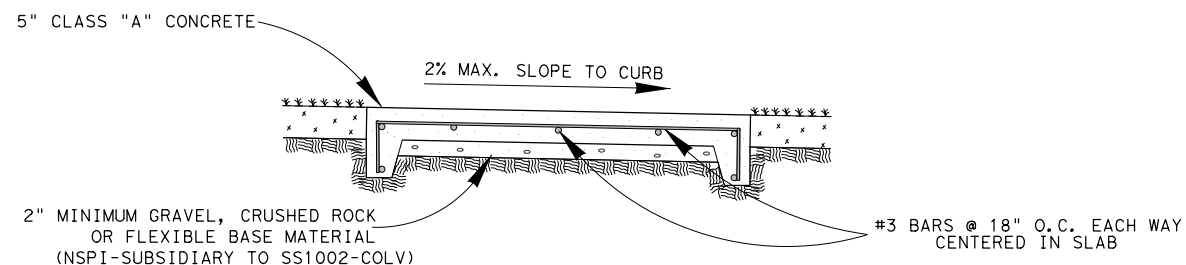

CONCRETE SIDEWALK SECTION (TYPE A)

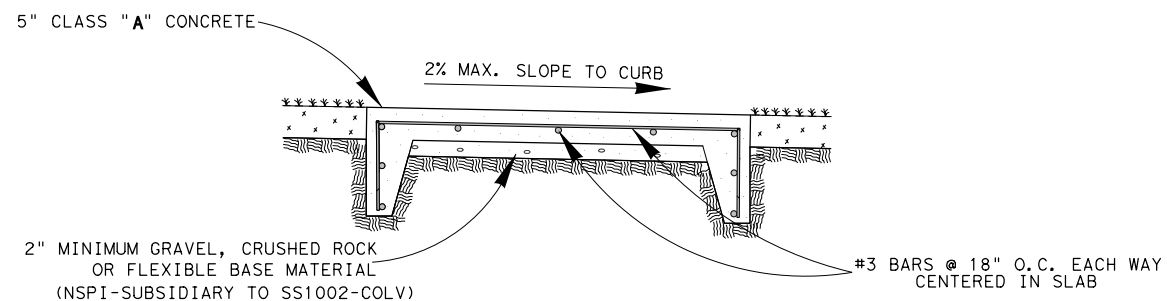

CONCRETE SIDEWALK SECTION (TYPE B)

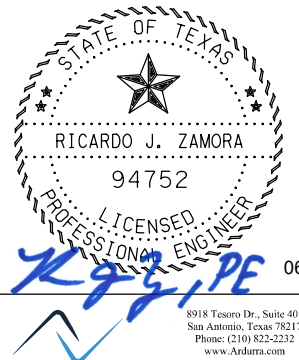

EL VERDE
HIKE AND BIKE TRAIL
CITY OF LEON VALLEY

PROPOSED
TYPICAL SECTIONS

SCALE: N.T.S.

FED. RD. DIV. NO.	FEDERAL AID PROJECT		SHEET NO.
6	STP 1502(065)MM		7
STATE	DIST.	COUNTY	
TEXAS	SAT	BEXAR	
CONT.	SECT.	JOB	HIGHWAY NO.
0915	12	514	SH 16